

Nordtest Method Proposal

Final version 1, prepared by Torben Holm Pedersen

2002-03-04
AV 1106/02

Impulsive noise

Objective method for the measurement of prominence of impulsive sounds and for adjustment of L_{Aeq}

Contents

1.	Scope.....	2
2.	Field of application.....	2
3.	References	2
4.	Definitions	3
4.1	Sound pressure level, in decibels, L_p	3
4.2	Weighted sound pressure level, in decibels, L_{pAF}	3
4.3	Energy-equivalent A-weighted sound pressure level, in decibels, $L_{Aeq,T}$	3
4.4	Impulse.....	3
4.5	Onset.....	3
4.6	Level difference.....	4
4.7	Onset rate	4
4.8	Measurement time interval.....	4
4.9	Reference time interval	4
5.	Instrumentation	5
6.	Measurements	5
6.1	Digital recording and signal processing	5
6.2	Analogue recordings	6
7.	Predicted prominence, P	6
8.	Adjustment to L_{Aeq}	6
9.	Accuracy	7
10.	Information to be reported	7
11.	Bibliography	8

1. Scope

Noise with prominent impulses is more annoying than continuous types of noise (without impulses or tones) with the same equivalent sound pressure level. Therefore an adjustment K_I is added to the measured L_{Aeq} , if prominent impulses are present in the noise, to adjust for the extra annoyance due to the impulses.

Impulsive sounds are characterised by a sudden onset, which makes them more prominent than continuous noise types, and makes the sound source identified more easily.

The adjustment to L_{Aeq} for impulses depends on how prominent the impulse characteristic is perceived through the continuous part of the noise.

Measurements according to this Nordtest method gives as the main result a measure for the prominence of impulsive sounds in the immission point. The method aims at predicting the prominence of impulsive sounds in correspondence with average subjective judgements. Based on the predicted prominence, P , a graduated adjustment, K_I , to the measured L_{Aeq} is defined.

The method is based on the presumption that the annoyance increases with increasing audibility (perceived prominence) of the impulses. The audibility of the impulses is expressed by the prominence, which shall exceed a certain limit before an adjustment is made to L_{Aeq} . Below this limit no adjustment is made. When the prominence rises, the adjustment increases.

The prominence P is defined by a logarithmic measure based on the level difference and onset rate of the A-weighted sound pressure level with time weighting F. The logarithmic scale together with time weighting F set in practice an upper limit for the adjustment.

2. Field of application

This method is related to the annoyance of noise and is not applicable to evaluation of the risk of hearing damages.

The method is a supplement to environmental noise measurements methods. Guidelines on how to perform such measurements in the field should be found in the relevant standards.

3. References

The following normative documents contain provisions which constitute - through reference in this text - provisions of this Nordtest Method. Parties using this Nordtest Method are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Nordtest as well as members of ISO and IEC maintain registers of currently valid International Standards.

1. IEC Publication 61672, Electroacoustics - Sound level meters¹⁾
2. IEC Publications 651 and 60651 Sound level meters
3. ISO 1996/1, Acoustics - Description, measurement, and assessment of environmental noise. Part 1: Basic quantities and assessment procedures
4. ISO 1996/2, Acoustics - Description, measurement, and assessment of environmental noise. Part 2: Determination of environmental noise levels

¹⁾ To be published, replaces IEC 60651 and IEC 60804.

4. Definitions

4.1 Sound pressure level, in decibels, L_p

The sound pressure level L_p is given by

$$L_p = 10 \lg \left(\frac{p}{p_0} \right)^2$$

p = root mean square sound pressure, in pascals;

p_0 = reference sound pressure (20 μ Pa).

4.2 Weighted sound pressure level, in decibels, L_{pAF}

When the sound pressure p is weighted in accordance with frequency weighting A and time-weighted in accordance with characteristic F (Fast), the weighted sound pressure level is denoted L_{pAF}

4.3 Energy-equivalent A-weighted sound pressure level, in decibels, $L_{Aeq,T}$ ²⁾

The value of the A-weighted sound pressure level of a continuous steady sound that has within a specified time period the same mean square sound pressure as a sound whose level varies with time. It is defined as

$$L_{eq,T} = 10 \lg \frac{1}{t_2 - t_1} \int_{t_1}^{t_2} \frac{p^2(t)}{p_0^2} dt \quad [dB]$$

$L_{eq,T}$ = energy-equivalent sound pressure level for the time interval T, starting at the time t_1 and ending at the time t_2 , [dB];

p_0 = reference sound pressure (20 μ Pa);

$p(t)$ = instantaneous value of the sound pressure of the noise signal, [Pa].

4.4 Impulse

The sudden onset of a sound is defined as an impulse.

Note: The definition includes only the onset of a sound, not the sound as a whole. "Sudden" is based on an auditive judgement, which is expressed in terms of physical measurements in this method.

The character and prominence of the impulse in the immission point depends on the character of the emitted sound, the distance and propagation path from the sound source and the background noise. Therefore the impulsiveness of a sound is characterised by the onset of the sound independently of the category of the sound source.

4.5 Onset

For the purpose of this method the onset of a sound is defined as the part of the positive slope of the time history of L_{pAF} where the gradient exceeds 10 dB/s.

The starting point of an onset is the point where the gradient first exceeds 10 dB/s. The end point of an onset is the first point after the starting point where the gradient decreases to less than 10 dB/s. Irregularities (on the onset) shorter than 50 ms are left out of account.

²⁾ The expression "equivalent noise level" has generally been used in the present Nordtest method in order to simplify the text.

4.6 Level difference

The level difference of an impulse is the difference in dB of L_{pAF} between the level of the end point L_e and the level of the starting point L_s of the onset.

4.7 Onset rate

The onset rate is the slope in dB/s of the straight line that gives the best approximation to the onset between the starting point and the end point.

Note: For pass-bys of e.g. road vehicles, trains or aircraft the onset rates shall be determined as the slope in the level range $L_e - (L_e - L_s)/2$ to L_e , i.e. the slope of the upper half of the level difference.

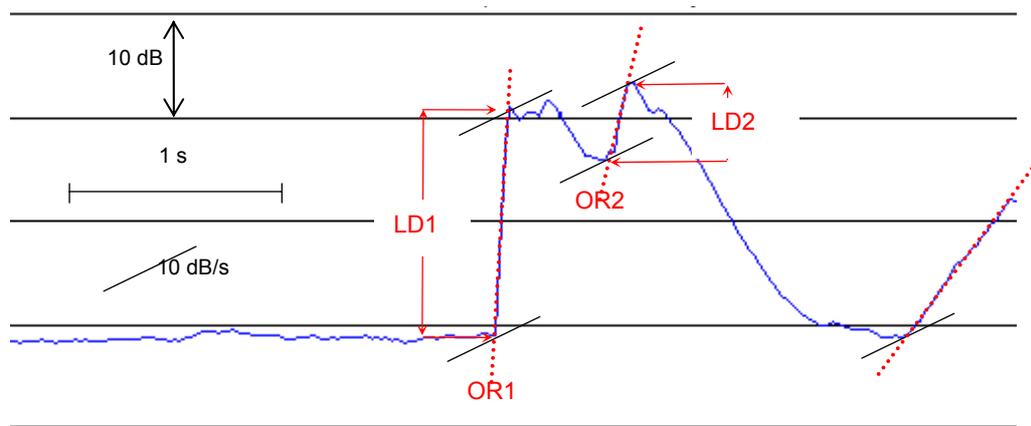


Figure 1. Time history of the A-weighted sound pressure levels with time weighting F (Fast). The figure illustrates the onset ratio (OR) and the level difference (LD) for the two most prominent impulses. Gradients of 10 dB/s are indicated with short line segments.

4.8 Measurement time interval

The time interval within which the squared sound pressure is integrated and averaged to determine the energy-equivalent sound pressure level.

4.9 Reference time interval

The time interval over which the noise exposure is averaged to determine the energy-equivalent sound pressure level.

4.10 Predicted prominence

The predicted prominence, P , is a measure, calculated from onset rate and level difference, which gives a good correlation with listening tests on how prominent impulsive sounds are perceived. P increases with increasing level difference and onset rate.

4.11 Adjustment to L_{Aeq}

A term, K_i in dB, that is added to the measured L_{Aeq} to account for the extra annoyance of impulsive noise.

5. Instrumentation

Measurement equipment applied for this measuring method shall be Class 1 as specified by IEC 651, 60651 or 61672. The complete measuring system shall comply with the IEC requirements, be it a sound level meter or a larger system including DAT-recorders or PC-based analysers.

The electric background noise level in the measuring set-up shall be at least 10 dB lower than the acoustic background noise level. Special care shall be taken to ensure that the system is not overloaded during measurement.

The equipment applied for the measurement shall be specified in the report. Special equipment shall be described.

The equipment shall be calibrated according to relevant regulations and guidelines for the actual measurement.

6. Measurements

Measurements shall be made on the basis of L_{pAF} , the A-weighted sound pressure level with time weighting F (Fast). The measurements may be performed by either digital or analogue methods or a combination of these.

6.1 Digital recording and signal processing

The A-weighted sound pressure level with time weighting F shall be sampled with time intervals in the range 10-25 ms. (incl.). Measurements made on the basis of short-term L_{Aeq} -values (e.g. 10 ms) shall (e.g. by computation) be approximated to time weighting F before the readings are taken.

Note: Measurements based on a series of short-term L_{Aeq} -values may be converted to a series of L_{pAF} -values by the following formula:

$$L_{pAF,n} = 10 \cdot \lg \left[\left(\left(\frac{\tau}{\Delta t} - 1 \right) \cdot 10^{\frac{L_{pA,F,n-1}}{10}} + 10^{\frac{L_{Aeq,n}}{10}} \right) / \left(\frac{\tau}{\Delta t} \right) \right]$$

$L_{Aeq,n}$ The n'th short-term L_{Aeq} -value

$L_{pAF,n}$ A-weighted sound pressure level with time weighting F at the time of the n'th L_{Aeq} -value, $L_{Aeq,n}$

τ Time constant for the time weighting. For F: $\tau = 125$ ms

Δt Time between the L_{Aeq} -values (and the integration time)

lg is the logarithm with base 10

From a successive series of sound pressure levels with time weighting F, $L_{pAF,n}$, the starting point s and the end point e of an onset are defined from the procedure 1)-4). The symbols used are defined below.

- 1) The starting point s is the first point where the slope is larger than 10 dB/s:

$$L_{s+1} - L_s > \frac{10}{f} \left[\frac{\text{dB/s}}{1/s} \right]$$

- 2) The end point e is the first point after the starting point where the slope is less than 10 dB/s:

$$L_{e+1} - L_e < \frac{10}{f} \left[\frac{\text{dB/s}}{1/s} \right]$$

- 3) A new starting point occurs when condition 1) is met again.

- 4) If a new starting point s_1 occurs within a period of 50 ms after the end point e , then end point e and start point s_1 shall be neglected if the following conditions are met:

$$(L_{e1} - L_e)/(t_{e1} - t_e) > 10 \text{ dB/s and } (L_{s1} - L_s)/(t_{s1} - t_s) > 10 \text{ dB/s}$$

e_1 is the end point after the new starting point s_1 . If point e is neglected, point e_1 takes over the name e .

$s+1$ denotes the point one sample after point s . L_s is the level of point s , and t_s is the time of sampling; L_e is the level of point e and t_e is the time of sampling, and so on. f is the sampling frequency.

For each onset the level difference is $L_e - L_s$, and the onset rate is found from the “least-squares method” (linear regression) of the points from s to e (incl.).

Note 1: For pass-bys of vehicles, aircraft etc. the onset rates shall be determined over the level range $L_e - (L_e - L_s)/2$ to L_e , i.e. the slope of the upper half of the level difference.

Note 2: In some measuring systems, the onset rate may be determined from the F-weighted samples as $-60/T$, where T is the reverberation time measured directly on the onset of the sound. Other systems require that the sound samples are reversed before such a measurement can be performed.

6.2 Analogue recordings

By analogue recording care shall be taken that the vertical writing speed (the level) is not limited by the writing system. By recordings in true time a writing speed of at least 1000 dB/s is necessary.

By visual readings of the onset rate from level recordings, the horizontal speed (the time) shall be sufficient to ensure a satisfactory accuracy of the gradient of the onset. A slope of 45° is recommended.

By the approximation of the onset to a straight line, irregularities shorter than 50 ms on the generally increasing curve (even decreasing levels) do not indicate the start of a new onset.

7. Predicted prominence, P

In periods of half an hour a number of impulses with the apparently highest onset rates and level differences shall be selected. For noise with shorter duration the impulses shall be selected during the whole period. For each selected impulse the predicted prominence, P , is calculated from:

$$P = 3 \cdot \lg (\text{onset rate}/[\text{dB/s}]) + 2 \cdot \lg (\text{level difference}/[\text{dB}]) \quad (1)$$

where the “onset rate” in dB/s and the “level difference” in dB are defined in the clauses 4.6 and 4.7. \lg is the logarithm with base 10. The impulse with the highest value of P gives the final result.

Note: The general form of the expression for P is: $P = k_1 \cdot \log(\text{onset rate}) + k_2 \cdot \log(\text{level difference})$. The constants k_1 and k_2 have been estimated from the results of listening tests. It is also taken into account that the relation between P for very sudden and loud impulses and P for slow level changes shall be large. P was furthermore designed to give a maximum around 15. With the constants given in formula (1) the predicted prominence explains 73% of the variance in the answers from the listening test mentioned in [2].

8. Adjustment to L_{Aeq} (Optional)

For sounds with onset rates larger than 10 dB/s the following adjustment K_1 , based on the predicted prominence P , may be applied:

$$K_1 = 1.8 \cdot (P - 5) \text{ dB, for } P > 5, \quad K_1 = 0 \text{ dB for } P \leq 5 \quad (2)$$

It is proposed that this adjustment is made to $L_{Aeq,30\text{min}}$ on the basis of the one event with the highest value of P occurring during the 30-minute period.

Note 1: According to this proposal the rating level $L_{Ar,T}$ over the reference time interval T related to the impulse characteristics is found from:

$$L_{Ar,T} = 10 \log \left(\frac{1}{T} \sum_N \Delta t_N 10^{\frac{L_{Aeq,N} + K_{I,N}}{10}} \right)$$

where:

T is the duration of the reference time interval
 Δt_N is the durations of the measurement time intervals, 0.5 hour
 $L_{Aeq,N}$ is the equivalent noise level of the time periods Δt_N
 $K_{I,N}$ is the adjustments to $L_{Aeq,N}$

Note 2: The general form of formula (2) is: $K_I = k_3 \cdot (P - k_4)$, for $P > k_4$, $K_I = 0$ for $P \leq k_4$. The constant k_3 gives the inclination of the correlation between K_I and P , and k_4 defines the lower limit for adjustment to L_{Aeq} . The values of the constants k_3 and k_4 have been determined to give correspondence with the extra annoyance reported in the literature for different kinds of noise sources. As the annoyance depends on the level and characteristics of the noise, the kind of sound source, the context and social factors, and as the adjustment K_I is meant to compensate for the extra annoyance from the impulses, it might be considered to operate with values of k_3 and k_4 that depends on the category of sound source.

Note 3: The time period of 30 minutes for adjustment of L_{Aeq} is a preliminary choice based on considerations of reasonableness and ease of measurements and administration. There are no systematic investigations behind this choice of period, and the principle should be considered in more detail when investigations of the relevant period are made.

Note 4: In the present Nordic guidelines for environmental noise, an adjustment of 5 dB is made on the basis of subjective judgement, and there are no possibilities of giving a graduated adjustment to L_{Aeq} or making the adjustments in periods of half an hour. Until revisions of these guidelines have been made, this present method may be used as a support of the subjective judgement. It is recommended to give the 5-dB adjustment when $K_I > 3$ and when the impulses are characteristic of the working operations.

9. Accuracy

Although the information about the measurements shall be given in terms of sound pressure levels, the method is not sensitive to the absolute calibration of the measuring equipment.

The working conditions of the source may be more critical than for measurements involving long-term averaging as e.g. measurements of L_{Aeq} .

In [3]) it was found that the mean standard deviations of the results of 16 different noise examples from 4 laboratories using 4 different measuring set-ups was 0.3 on the prominence P and 0.6 dB on the adjustment K_I .

10. Information to be reported

The report shall contain the information required by the relevant guidelines for the noise measurements. Additionally the following information shall be given:

- State that the measurement has been performed in accordance with the specifications in the present Nordtest method
- Type, make and model of Recording and analysis equipment
- Sampling rate for L_{pAF}
- Procedure used for the measurement of level difference and onset rate
- The working conditions that cause the impulses and the time of the specific measurements

- Weather conditions as required in relevant guidelines or standards
- Measured values of level differences and onset rates
- Calculation results of the prominence P , and the adjustment K_i and associated uncertainties

11. Bibliography

The background of the method is described in:

- 1) Pedersen, T. H. *Audibility of impulsive sounds in environmental noise*. Inter-Noise 2000 CD-ROM proceedings .
- 2) Pedersen, T. H., *Impulsive noise. An objective measuring method for the prominence of impulsive sounds and for the adjustment of L_{Aeq}* (report in Danish with expanded English summary), <http://www.mst.dk/udgiv/publikationer/2001/87-7944-375-3/html>, Working report no. 1, Danish Environmental Protection Agency 2001.
- 3) Andersson, H., et al. *Round Robin Test of an objective measuring method for the determination of the prominence of impulsive sounds and for the impulse adjustment of L_{Aeq}* . SP Rapport 2000:30, Acoustics, Borås 2000.